



**Product description**

Each Vanguard Totally Enclosed Lifeboat is designed and manufactured to SOLAS 86 regulation, and also adheres closely to stringent governmental requirements.

Launched via conventional davits, these lifeboats are designed to evacuate crew - safely and efficiently - from vessels and offshore platforms. These lifeboats also come fully-equipped with the latest Spearhead On-Off load hook release systems incorporating the Fall Preventive Device (FPD), which are both user-friendly and easy to maintain.


Vanguard ensures easy access to critical spares and expert maintenance services for all major areas, including the engine, gearbox, steering systems, compressed air and water systems, through our global after-sales service network. Recertification as per SOLAS requirements is also available at most major ports.

**Dry cargo version**


Model	Dimensions	Capacity	Speed	Hook Distance	Weight Unloaded	Full Loaded
VG7.5C	7.50 x 2.86 x 3.10m	66p	> 6 knots	7.10m	3220kg	8170kg
VG8.5C	8.50 x 3.20 x 3.30m	85p	> 6 knots	8.00m	4354kg	10729kg
VG11.95C	11.95 x 3.85 x 3.70m	150p	> 6 knots	11.28m	5680kg	16930kg

**Tanker version**

Model	Dimensions	Capacity	Speed	Hook Distance	Weight Unloaded	Full Loaded
VG7.5F	7.50 x 2.86 x 3.10m	66p	> 6 knots	7.10m	3500kg	8450kg
VG8.5F	8.50 x 3.20 x 3.30m	85p	> 6 knots	8.00m	4685kg	11060kg
VG11.95F	11.95 x 3.85 x 3.70m	150p	> 6 knots	11.28m	6100kg	17350kg

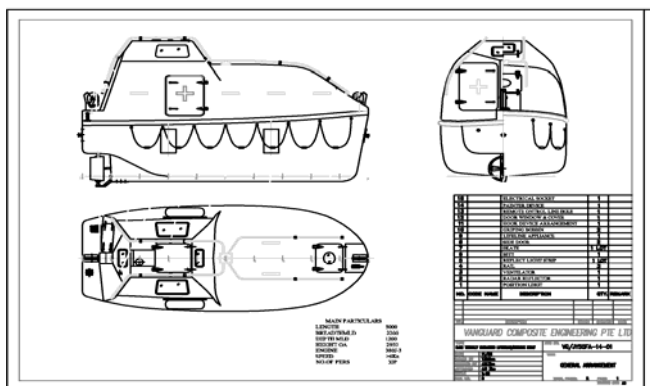

**Classification Societies**



**Vanguard Composite Engineering Pte Ltd**

151 Chin Swee Road, #03-14 Manhattan House Singapore 169876

Tel: +65 6887 5034 Fax: +65 6887 5043

www.vanguardce.biz sales@vanguardce.biz

**Sales Agent**





## Product description

Every Vanguard Free Fall Lifeboat is designed and built to SOLAS 86 regulations, and in full accordance to stringent international maritime quality standards.

Ramp-launched, this highly-durable lifeboat is designed to evacuate mariners - safely and efficiently - from vessels or offshore platforms, and is boarded through the aft hatch. The 'Spearhead' FF Class hook release systems are specifically designed for easy operation, even under severe conditions.


At Vanguard, we ensure convenient availability of critical spares and also expert maintenance services for all major areas, including the engine, gearbox, steering system, compressed air and water spray systems through our global after-sales service network. Recertification as per SOLAS requirements is also available at most major ports.

## Dry cargo version


Model	Dimensions	Capacity	Freefall Height	Launch Angle	Length of Ramp	Speed	Weight Unloaded	Full Loaded
VG4.9FC	4.90 x 2.36 x 3.00m	20p	16m	35 <sup>0</sup>	5.50m	> 6 knots	2950kg	4450kg
VG5.9FC	5.90 x 2.36 x 3.00m	26p	16m	35 <sup>0</sup>	6.30m	> 6 knots	3208kg	5158kg

## Tanker version

Model	Dimensions	Capacity	Freefall Height	Launch Angle	Length of Ramp	Speed	Weight Unloaded	Full Loaded
VG4.9FF	4.90 x 2.36 x 3.00m	20p	16m	35 <sup>0</sup>	5.50m	> 6 knots	2950kg	4450kg
VG5.9FF	5.90 x 2.36 x 3.00m	26p	16m	35 <sup>0</sup>	6.30m	> 6 knots	3208kg	5158kg

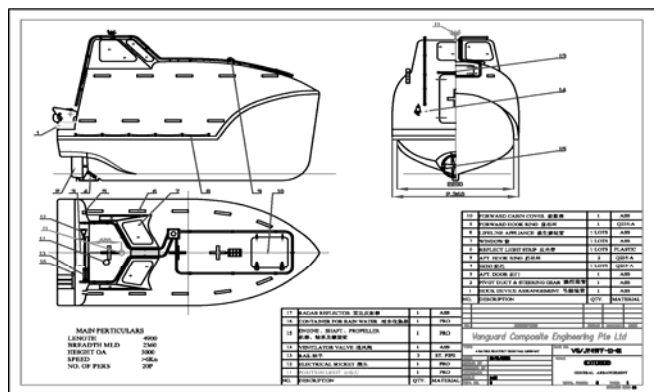

## Classification Societies



## Vanguard Composite Engineering Pte Ltd

151 Chin Swee Road, #03-14 Manhattan House Singapore 169876

Tel: +65 6887 5034 Fax: +65 6887 5043

www.vanguardce.biz sales@vanguardce.biz

## Sales Agent





## Product description

Vanguard Rescue Boats and Fast Rescue Boats are designed and built to the latest SOLAS 86 regulations and conform fully to international governmental requirements.

The hull is built of fibre composite materials and launched using either conventional single-arm slewing davits or 'A' frame type davits depending on boat size and other specifications. These boats come fitted with the latest Off load rescue boat release systems, which are user friendly and easy to maintain. Depending on the model, these rescue boats are either fitted with petrol outboard engine (single or twin) or inboard diesel engines coupled with water jet units.


Vanguard ensures easy access to critical spares and expert maintenance services for the engine, gearbox, steering systems, self righting systems and other major areas, through our global after-sales service network. Rectification as per SOLAS requirements is also available at most major ports.

### Rescue boat

Model	Dimensions	Capacity	Speed	Engine	Weight Unloaded	Full Loaded
VG4.0KR	4.00 x 1.86 x 0.85m	8p	> 6 knots	25hp OBM	500kg	1100kg
VG4.5DR4	4.50 x 2.00 x 0.85m	8p	> 6 knots	380J-3	830kg	1430kg

### Fast rescue boat

Model	Dimensions	Capacity	Speed	Engine	Weight Unloaded	Full Loaded
VG6.0FRK	6.00 x 2.30 x 0.87m	15p	20 knots	60-90hp	1190kg	2315kg
VG6.0FRW	6.00 x 2.30 x 0.87m	15p	20 knots	144hp	1450kg	2575kg

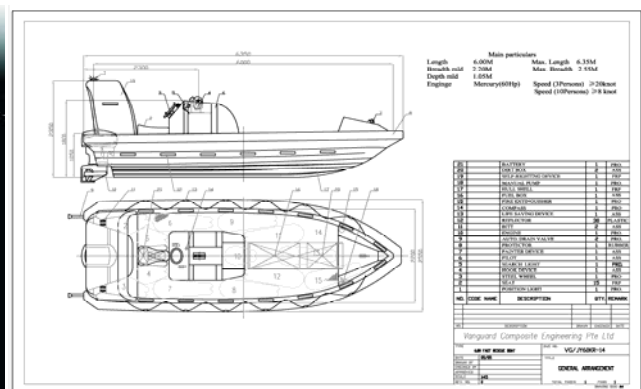

### Classification Societies



### Vanguard Composite Engineering Pte Ltd

151 Chin Swee Road, #03-14 Manhattan House Singapore 169876

Tel: +65 6887 5034 Fax: +65 6887 5043

www.vanguardce.biz sales@vanguardce.biz

### Sales Agent

